

SET WINDOW SILL PAN IN A BED OF WET SEALANT (BY OTHERS)

SEALANT (BY OTHERS)

OPTIONAL TOP COAT HENRY DEQCOAT 50

PAVER SYSTEM OR GRAVEL BALLAST

PERFORATED EDGE RESTRAINT

GROWING MEDIA (VEGETATION NOT SHOWN FOR CLARITY)

FILTER FABRIC

OPTIONAL MOISTURE RETENTION FABRIC

WATER RETENTION AND DRAINAGE COMPOSITE

INSULATION


OPTIONAL DRAINAGE COMPOSITE

ROOT BARRIER

PUMADEC FLEX 30SL (80 MILS)
REINFORCED WITH
PUMADEC N-FLEECE

PUMADEC PRIMER 20
OR **HENRY GC PRIMER**

PUMADEC FLEX 30SL (80 MILS)
REINFORCED WITH
PUMADEC N-FLEECE

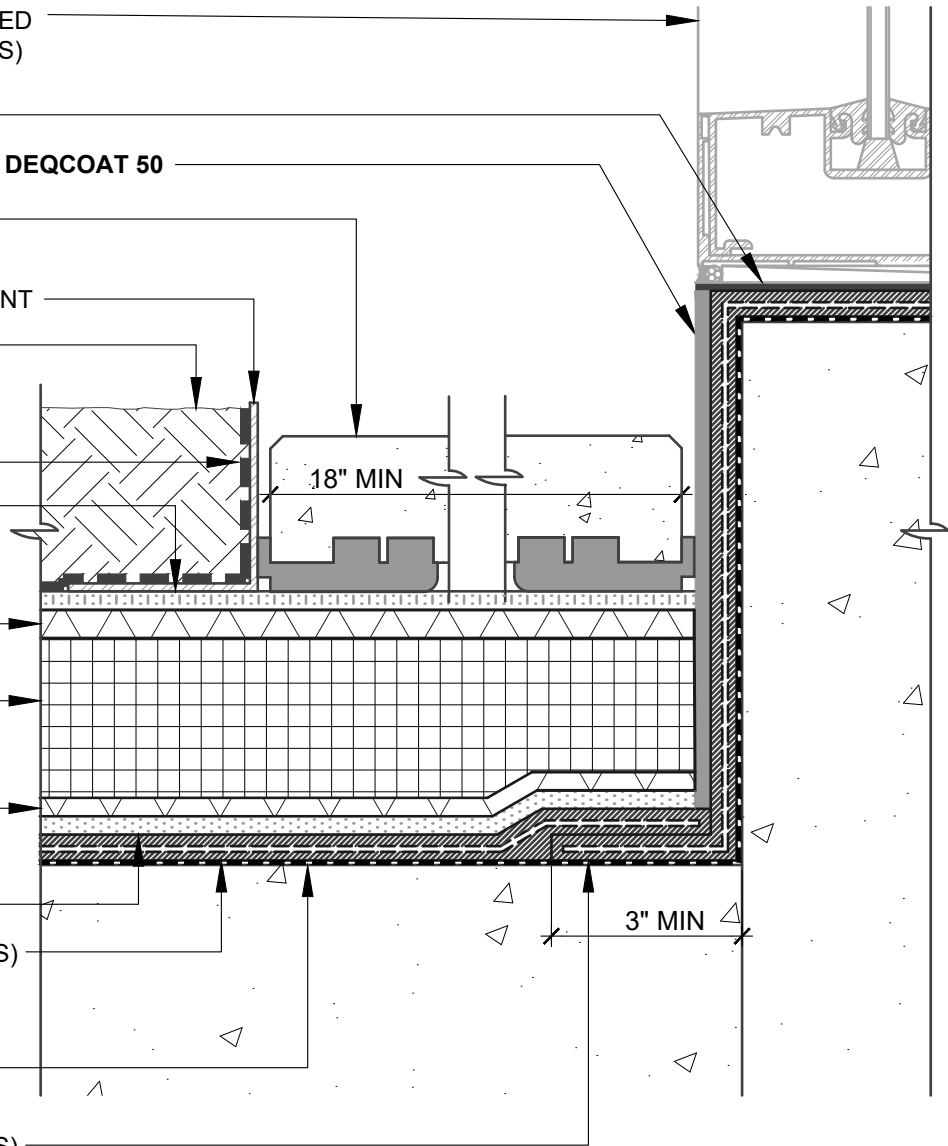

NOTES:

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH **PUMADEC** SYSTEM WATERPROOFING ASSEMBLY WITH A REINFORCED FIELD MEMBRANE. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. DO NOT INSTALL **PUMADEC** SYSTEM BEYOND PRIMED SURFACES.
3. BACK COAT FLEECE ON VERTICAL SURFACES WITH **PUMADEC** RESIN.
4. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
5. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT REQUIREMENTS.
6. REFER TO THE **PUMADEC** SYSTEM GUIDE SPECIFICATION AND WATERPROOFING DETAILS FOR RECOMMENDED INSTALLATION PROCEDURES.

Henry®

999 N. Pacific Coast Hwy, Suite 800
El Segundo, CA 90245
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY® DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

VEGETATIVE ROOFING - PUMADEC SYSTEM

WINDOW SILL REINFORCED FIELD MEMBRANE (CSP 3-5) UPTURN FLASHING AT WINDOWSILL

SCALE: N.T.S. 06-01-2020

VR-PUMA-R9B