

PAVER SYSTEM OR  
GRAVEL BALLAST

PERFORATED EDGE RESTRAINT

GROWING MEDIA  
(VEGETATION NOT  
SHOWN FOR CLARITY)

FILTER FABRIC

OPTIONAL MOISTURE  
RETENTION FABRIC

WATER RETENTION  
AND DRAINAGE  
COMPOSITE

INSULATION

OPTIONAL DRAINAGE  
COMPOSITE


ROOT BARRIER

**MODIFIEDPLUS G100S/S**

**HENRY 790-11/790-11EV**  
2-PLY 215 MIL REINFORCED  
WITH **POLYESTER FABRIC**

**HENRY 910 ASPHALT PRIMER OR**  
**HENRY 930 POLYMER MODIFIED ADHESIVE**

CONTINUOUS SUBSTRATES ONLY  
**POLYESTER FABRIC SET IN HENRY 790-11 (125 MILS)**

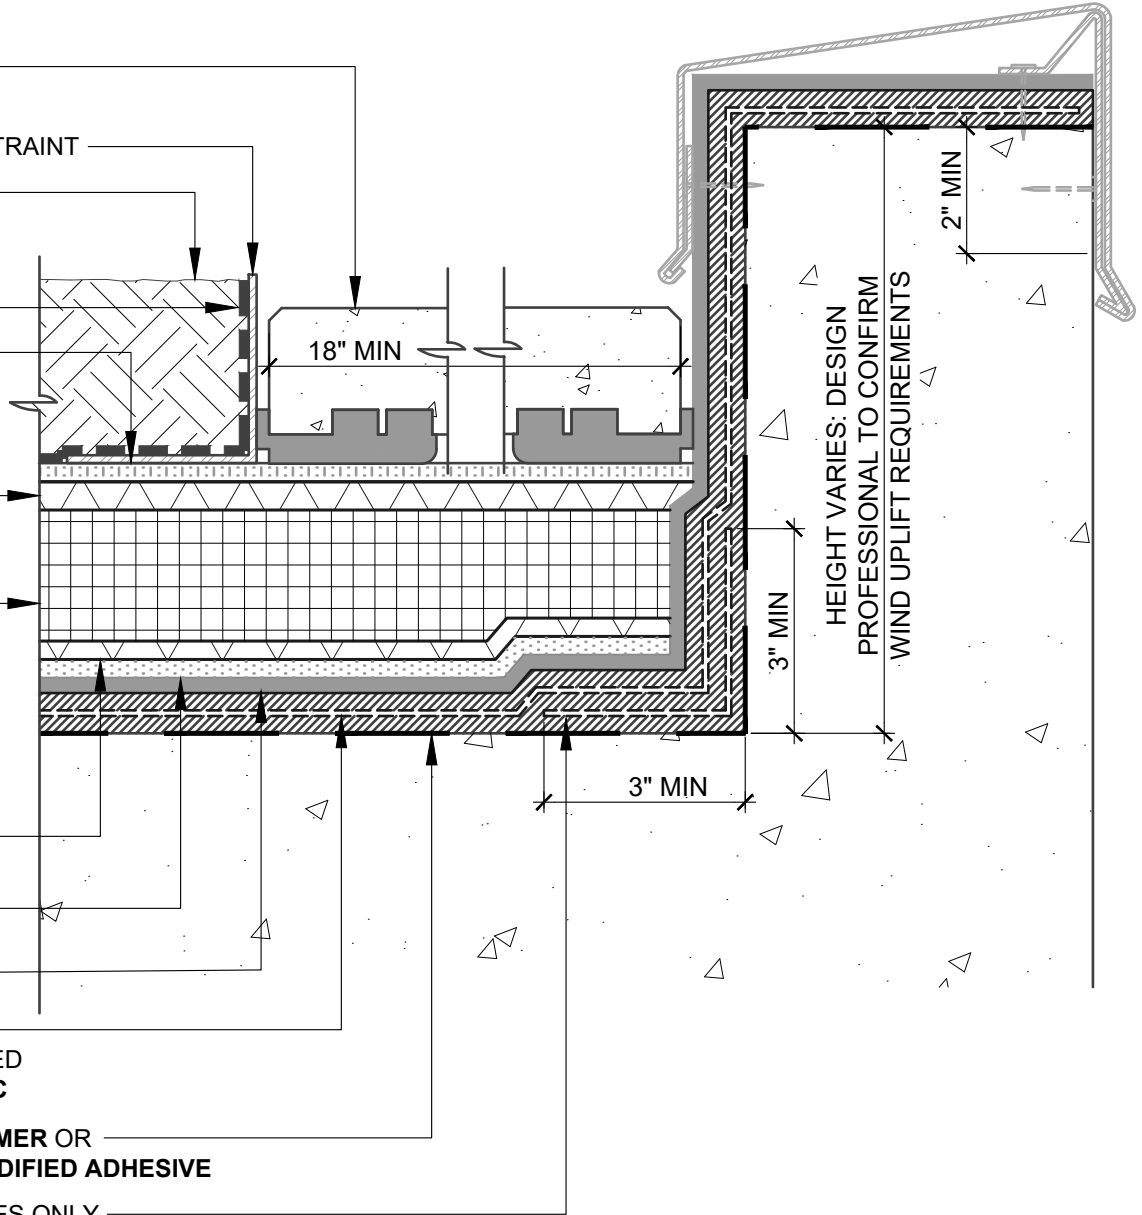

HEIGHT VARIES: DESIGN  
PROFESSIONAL TO CONFIRM  
WIND UPLIFT REQUIREMENTS

**NOTES:**

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH **HENRY 790-11/790-11EV** WATERPROOFING/ROOFING ASSEMBLY. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. THIS DETAIL IS INTENDED FOR CONTINUOUS SUBSTRATES. REFER TO ALTERNATE CURB/UPTURN DETAILS FOR FLASHING OPTIONS AT COLD JOINTS AND/OR SUBSTRATE GAPS ARE ANTICIPATED.
3. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
4. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT MINIMUM REQUIREMENTS.
5. REFER TO THE VEGETATIVE ROOFING GUIDE SPECIFICATION FOR RECOMMENDED INSTALLATION PROCEDURES.



999 N. Pacific Coast Hwy, Suite 800  
El Segundo, CA 90245  
800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

**VEGETATIVE ROOFING - HENRY 790-11/790-11EV**

**PARAPET**  
**REINFORCED CORNER**  
**POLYESTER FABRIC REINFORCEMENT**

SCALE: N.T.S. 06-01-2020

**VR-790-11-3B2**